

New! Canary Uni-Directional Data Security Diodes

Featuring:

- **One-Way, Two-Channel Data Transmission** ▪ **Unauthorized Transmissions Blocked** ▪
 - **RJ-45 Auto-Negotiation and Auto-Cross for Simple Host Connections** ▪
 - **"We Deliver Increased Confidence and Peace of Mind to the Customer!"** ▪

Canary Uni-Directional Data Security Diodes defend against a broad range of external or internal/insider cyber threats that can escape common security applications to reveal or corrupt sensitive data and make mission-critical information services non-available.

Protect secure servers and sensitive data from compromise. Place Data Security Diodes in environments where un-restricted two-way, bi-directional communications increase the risk of penetration, malicious attack and data loss.

Application 1: Data Security Diodes with *Dual* input/output channels, forward information originating from two *un-secured* open sources, to a pair of restricted, High-Security Host destinations using two Fiber-optic links. They simultaneously partition each data path to completely block sensitive data from being transmitted in the reverse direction.


Application 2: Position a set of Data Security Diodes to *selectively forward* over a partitioned Fiber link, the authorized data originating from two trusted High-Security sources, to a pair of unprotected *insecure* destinations.

Partitioned data paths *shield* Secure Sources from hidden viruses, Trojans, malicious programs or other intrusion attempts and prevent the corruption or unintended release of critical data, or its loss and non-availability.

Local Diode/Host UTP connections are nominally full duplex. However, bi-directional full duplex traffic is never transmitted between linked Data Diodes. Data handling functions including IP acknowledgement, Flow-Control and error correction are completely disabled and no internal or external means are available to restore inter-Diode bi-directional capability.

As another defensive layer for your critical data, Canary Data Security Diodes "Deliver increased confidence and peace of mind!"

CT-20TD/ CT-20TR & GT-55TD/ GT-55TR Dual-Channel Data Diodes

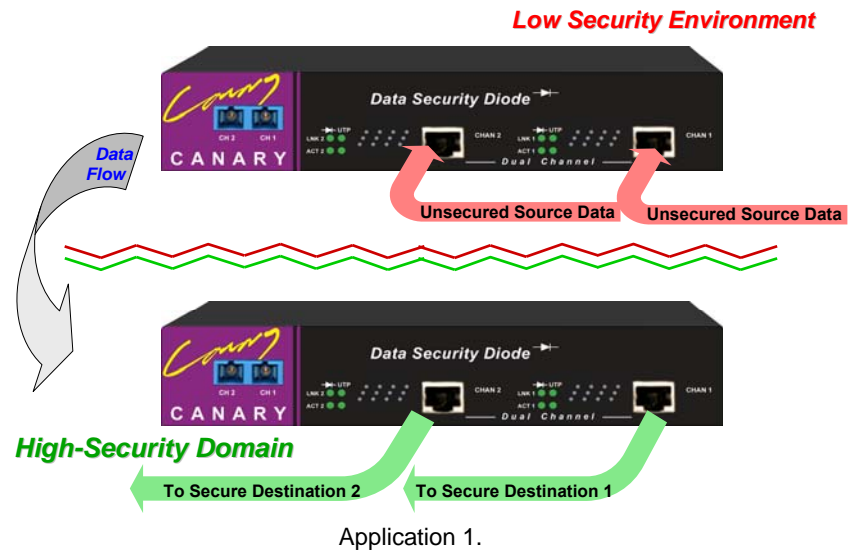

▪ Plug-and-Go Connections:

Configure your applications to run via UDP. Connect (2) *un-secure* devices to CT-20TD or GT-55TD transmit-only Data Security Diodes that forward the traffic to remote, receive-only CT-20TR or GT-55TR Diodes. The receive-only Diodes copy the traffic to a pair of secure Destination Hosts. (Application 1). Reverse the configuration for Application 2.

▪ Flexible, Secure Network/Host Configurations:

Low to High: Forward information to a Higher Security environment while blocking the un-authorized release of sensitive data in the reverse direction;

High to Low: Restrict authorized user access. Maintain System and Data Security, Integrity and Availability while allowing the limited export of selective information to lower security-level destinations.

▪ Hardwired Immunity from External Software threats:

Canary Data Security Diodes execute their key functions in hardware. With tamper-resistant cases, there is no vulnerable, software, firmware, memory or buffers that can be exploited to attack and surreptitiously alter or disable Uni-directional operation.

Using UDP or similar protocol over a point-to-point link eliminates the need for normal transmission acknowledgments.

Control physical access to your Canary Data Security Diodes and safely deliver critical data where needed – *Easy, Secure, Information Availability!*

Canary Communications

Main Features:

Interfaces – Inter-Diode Links & Local Connections:

- CT-20TD1: (Two) Simplex SC Fiber ports: **Tx** only, 100BASE-FX *
(2) *Local* Source-Host ports: RJ-45/UTP
CT-20TR1: (2) Simplex SC Fiber ports: **Rx** only, plus (2) *Local* RJ-45
- CT-20TDS1: Same as CT-20TD1 above, with Fiber ports SC (s/m) *
CT-20TRS1: Same as CT-20TR1 above, with Fiber ports SC (s/m)
[1 ~ SC-type m/m Fiber connector, 2 ~ ST-type; S1 ~ SC s/m connector]
- GT-55TD: (Two) Simplex SC Fiber ports: **Tx** only, 1000BASE-SX *
(2) *Local* Source-Host ports: RJ-45/UTP
GT-55TR: (two) RJ-45 (1000BASE-T), **Rx** (2) 1000Mb m/m (SX-SC) *
- GT-31TD: Same as GT-55TD above, with Fiber ports SC/LX (s/m) *
GT-31TR: Same as GT-55TR above, with Fiber ports SC / LX (s/m)
[X = 55 ~ multi-mode, SC-type and X = 31 ~ single-mode, SC-type]

Other versions change modes, utilize CWDM or long-reach multiplexed optics for *inter-diode links* between *Transmit-only* and *Receive-only* units.

Networking – Local User Connections:

- 100BASE-TX & 1000BASE-T: Auto-negotiation and Auto-crossover enable half/full duplex Ethernet Diode Links with *local* Source and separately, *remote* Destination equipment.
- * 100 & 1000 Mbps Ethernet *Inter-Diode Links* do not forward full duplex bi-directional traffic. UDP Destination Address, Port Number & Checksum can be enabled by application *

Management:

- No management reporting or access to internal functions
- No provision for error handling/reporting

Mechanical & Environmental:

- Inside, Desktop locations or 19" rack-enclosures
- A pair of units can be mounted side-by-side on a standard 19"-wide shelf (available from Canary)

Please contact Canary for technical details on additional models.




Pending



Specifications:

Standards:	IEEE 802.3u	100BASE-TX, 100BASE-FX *
	IEEE 802.3ab,z	1000BASE-T, 1000BASE-SX/LX *
	IEEE 802.1d	Spanning Tree: None
	IEEE 802.1q	VLAN: Limited Functionality
	IEEE 802.3x	Flow Control Not Supported
Throughput:	100 Mbps (One-way transmission Max.)	
	1000 Mbps (One-way transmission Max.)	* (See Note – above/right column) *
Maximum Distances:	RJ-45/UTP: 100 meters	
	Fiber Optic: 100 Mb: 2 Km, 20, 40, 60, 80 Km	
	1000 Mb: 500 m, 10, 20, 30, 60 Km	

Power:	100 ~ 240 VAC Auto-ranging wall-mount; 9 - 48 VDC input plus Terminal Block option
Temperature:	Operating: 0° C to 50° C Storage: -20° C to 70° C
Humidity:	Operating: 10% to 80% RH Storage: 5% to 90% RH
Emissions:	FCC Part 15 of Class B & CE: Pending
Safety:	US 21 CFR (J) & EN 60825-1 standards and UL 1950 applications, EN 60950: Pending
Dimensions:	5.21 in. x 8.43 in. x 1.64 in. (D x W x H) [12.7 cm x 20.3 cm x 4.4 cm] (D x W x H)
Weight:	5.5 lb. (2.5 Kg) (Shipping Wt.)

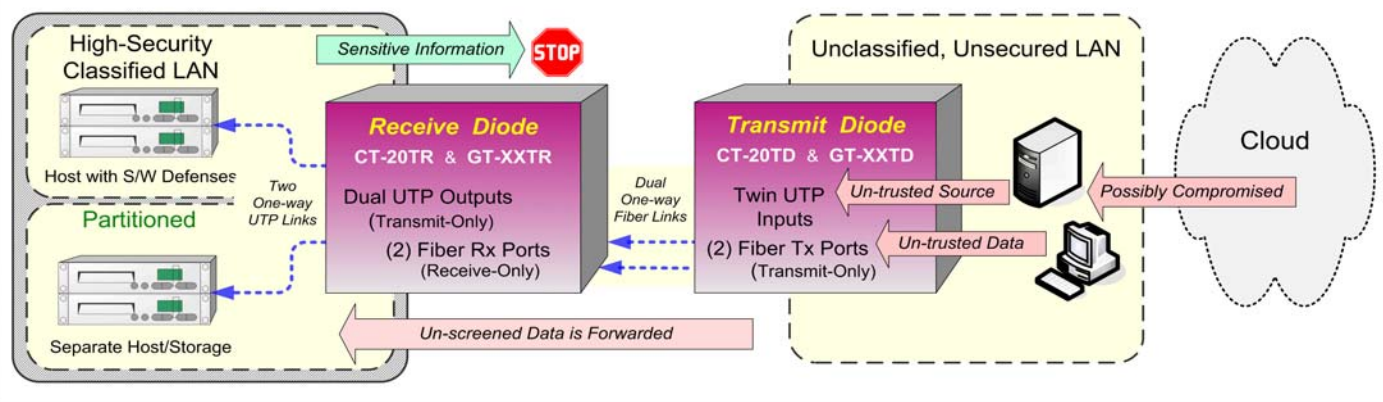

JM 09.19.11

Preliminary Specifications

For more information please visit us at:
www.canarycom.com
info@canarycom.com

Canary Communications is an
ISO 9001 : 2008 Registered Company

